

# PRL UPDATE SOFTWARE NOTES



Model	Chameleon PRL Update Software Notes
Revision:	Revision 1.0

3066 Beta Avenue Burnaby, B.C. V5G 4K4  
Phone: 604.294.4465  
Fax: 604.294.4471  
[support@cypress.bc.ca](mailto:support@cypress.bc.ca)

# 1 Contents


1	Contents.....	2
2	Revision Control.....	2
3	What you need to update the PRL:.....	2
4	Steps.....	3
5	Verify.....	3
6	Technical Support/Warranty: .....	3

# 2 Revision Control

Description	Revision	Date
Customer Release	Revision 1.0	Feb-2009

# 3 What you need to update the PRL:

- MSL for the AC595 card
- PRL file to load
- Ethernet cable for local update

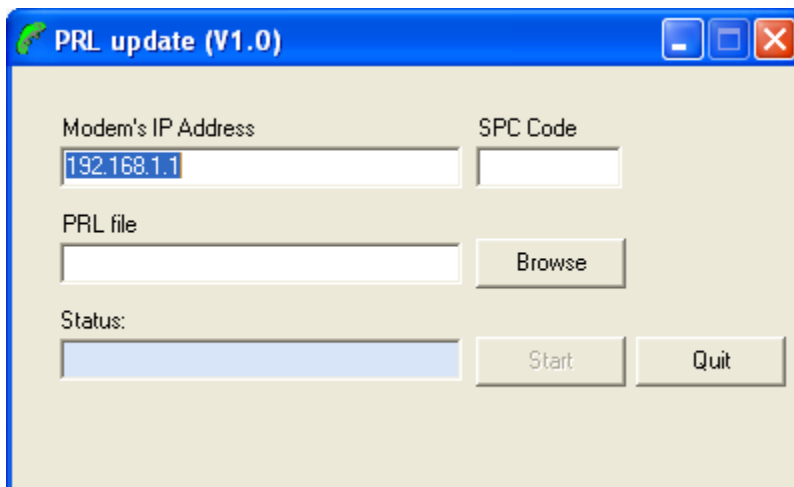

## 4 Steps

1. Power up the modem and allow the modem boot up.
2. Start the PRL Update program.
3. The modem's PRL can be updated either locally or remotely. For local update, plug in the Ethernet cable from the modem to the PC. Allow the PC to acquire an IP address. Use the IP address 192.168.1.1. For remote update, you will need to obtain the modem's network IP. This IP address need to publicly access so that you can talk to the modem over the network. One way to obtain the IP address is to locally telnet to the modem at 192.168.1.1 over the Ethernet connection. Once logged in, type "cmd ipadr".
4. Provide the IP address for the modem, the Modem MSL and the browse and select the PRL file.
5. Click on Start. The "Status" will indicate when the update is done.
6. Power cycle the modem.

## 5 Verify

1. Before you power cycle the modem, type "cmd mode 1" and "cmd save".
2. Let the modem boot up. When you get a prompt, type "cmd passthru". This you will let you talk to the AC595 card directly.
3. Type "at!prlver". Check to see if the PRL I correct.
4. Type "EXIT" to escape. Put the modem back in "cmd mode 2".

## 6 Technical Support/Warranty:

**Cypress Solutions Service  
Support Group**

1.877.985.2878 or 604.294.4465  
9.00am to 5.00pm PST  
support@cypress.bc.ca